


BAYVIEW type 30 lighting pole

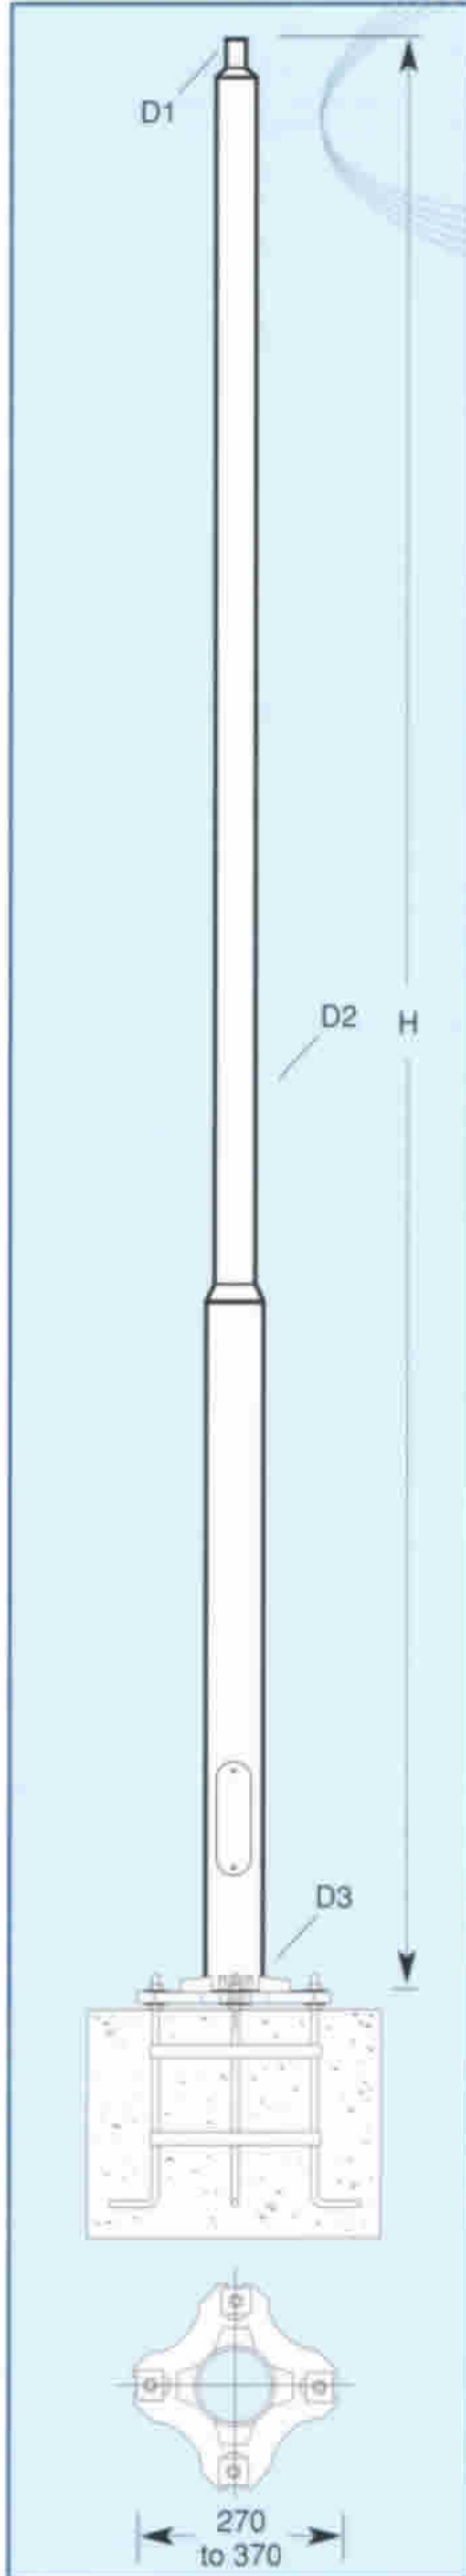

DESIGNERS AND MANUFACTURERS OF
URBAN STREETWARE AND LIGHTPOLES

GOLDSPAR

Bayview uses stepped tubes for the visual effect of a tapered pole but at less cost.

Poles can be set in the ground or supplied welded to a cast aluminium base plate (recommended).

For other outreach arm options, see the accessories page.

Structural note: Goldspar tapered aluminium light poles are manufactured to comply with Australian Standards (AS1170.2 -1989) from high quality 6000 Series aluminium tube.

All poles have structural engineering certification for above ground structures.



Type 30 - specifications

Code	H	D1	D2	D3
30/3	3000	60	80	125
30/3.5	3500	76	80	125
30/4	4000	76	80	125
30/4.5	4500	76	80	135
30/5	5000	76	80	135

Average depth for footing is 1/10th pole height
(consult your structural engineer).

Standard screwed hatches

