


MANNINGHAM type 15 lighting pole

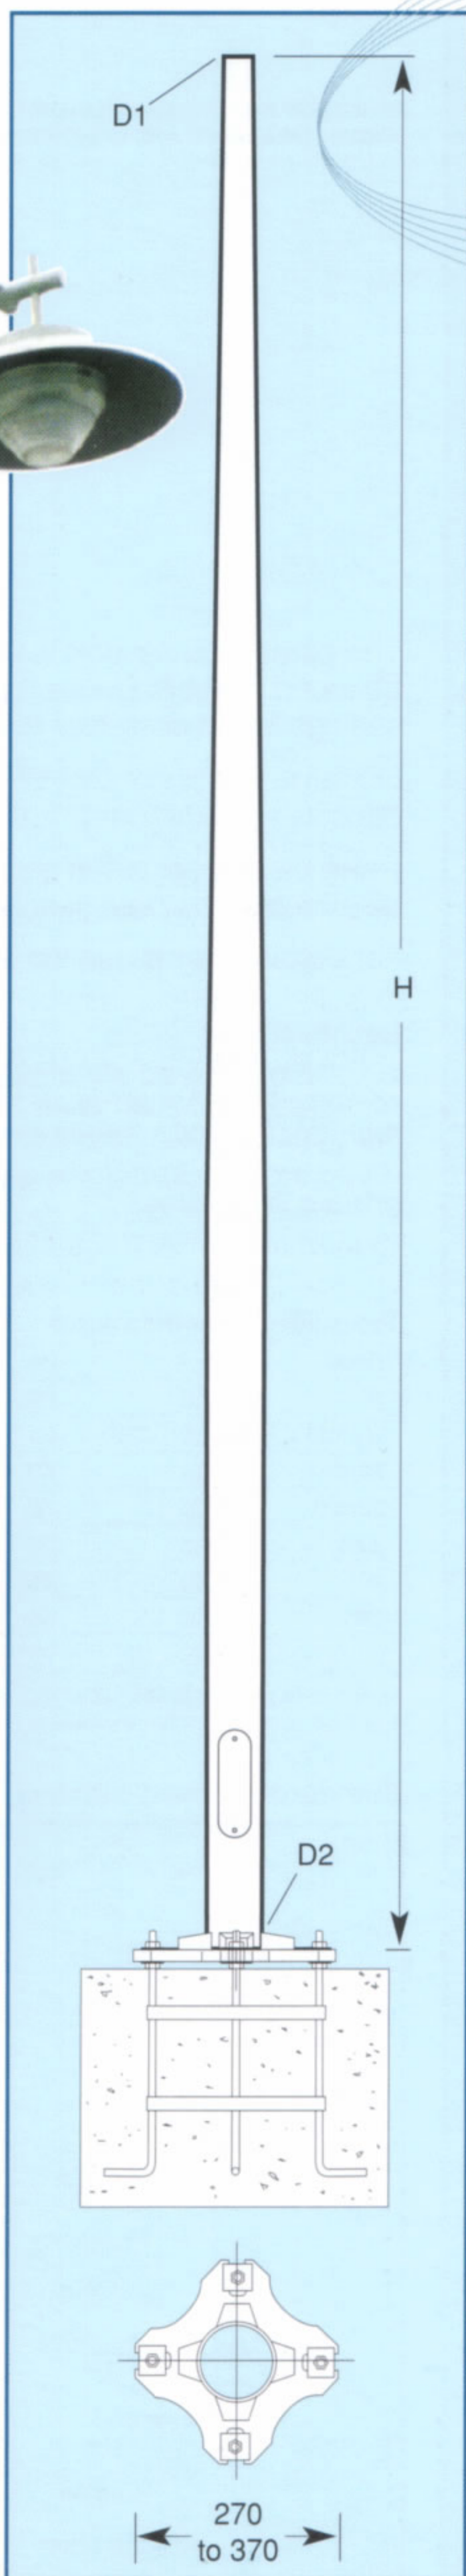

DESIGNERS AND MANUFACTURERS OF
URBAN STREETWARE AND LIGHTPOLES

GOLDSPAR

Another adaptation of a council-designed tapered pole, with a longer tapered top and special light outreach arm added. The Manningham design highlights the sharpness of detail and fine finish of aluminium, a visual effect not possible with other materials.

Poles can be set in the ground or supplied welded to a cast aluminium base plate (recommended).

For other outreach arm options, see the accessories page.

Structural note:

Goldspar tapered aluminium light poles are manufactured to comply with Australian Standards (AS1170.2 -1989) from high quality 6000 Series T6 aluminium tube.

All poles have structural engineering certification for above ground structures.

Type 15 - specifications

Code	H	D1	D2
15/5	5000	76	135
15/6	6000	76	150
15/7	7000	76	150
15/8	7000	76	150

Average depth for footing is 1/10th pole height (consult your structural engineer).

Standard screwed hatches

