


REGENCY type 40 lighting pole

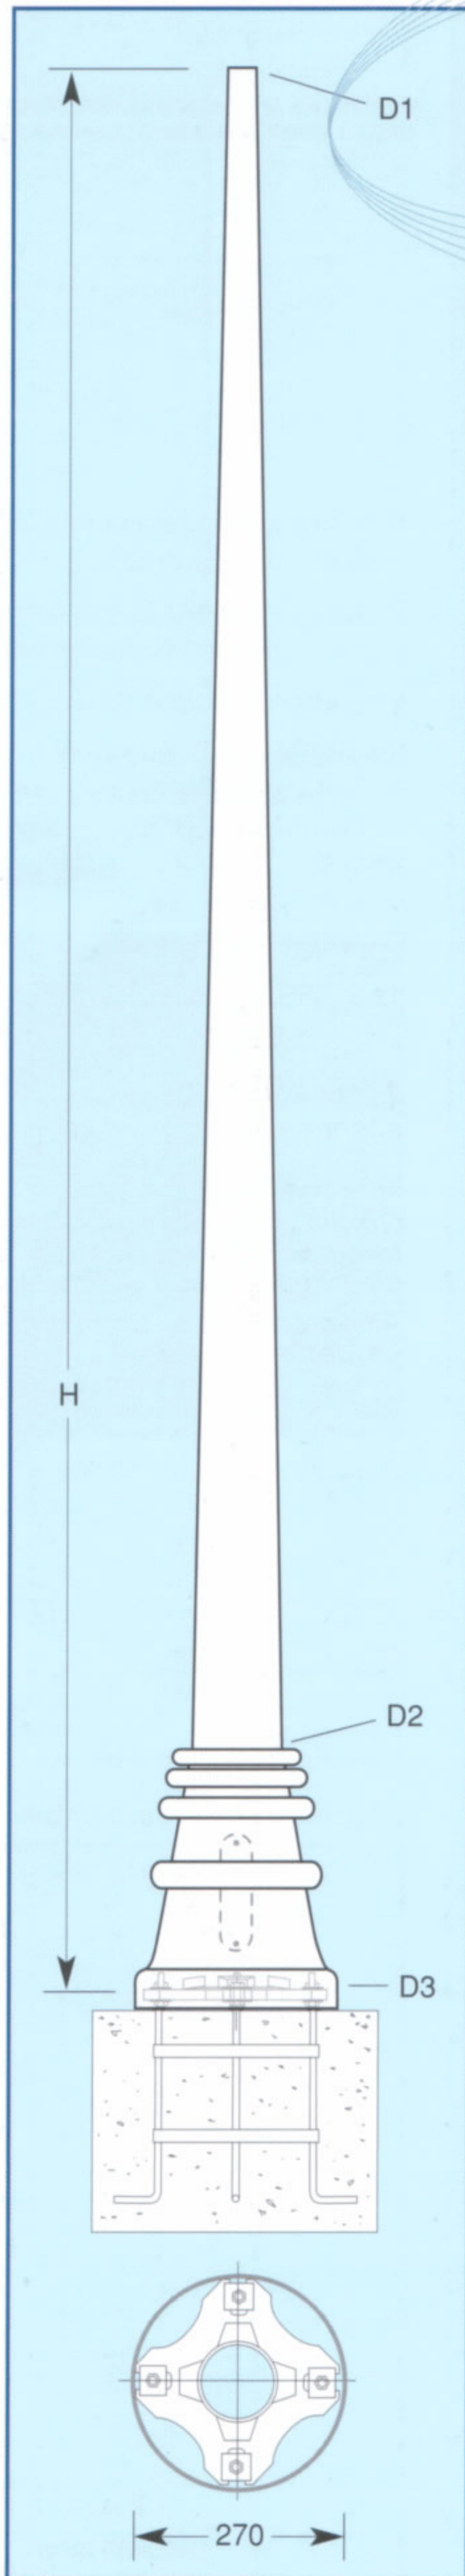

DESIGNERS AND MANUFACTURERS OF
URBAN STREETWARE AND LIGHTPOLES

GOLDSPAR

The Regency pole is an ideal enhancement when a period effect is desired.

Regency's cast aluminium base gives it the period look, while the top of the pole is cone tapered to give strength.

The pole has a base plate mounting system with rag bolts set in concrete.

Hatch access is gained by lifting the base casting after unscrewing a grub screw.

For other outreach arm options, see the accessories page.

Structural note:

Goldspar tapered aluminium light poles are manufactured to comply with Australian Standards (AS1170.2 -1989) from high quality 6000 Series aluminium tube.

All poles have structural engineering certification for above ground structures.

Type 40 - specifications

Code	H	D1	D2	D3
40/4	4000	76	150	360
40/4.5	4500	76	150	360
40/5	5000	76	150	360
40/5.5	5500	76	150	360
40/6	6000	76	150	360
40/7	7000	76	150	360

Average depth for footing is 1/10th pole height (consult your structural engineer).

Standard screwed hatches

